

Door window assembly instructions

How are the magnet and evaluation unit installed correctly?

Problems with the switching behavior of the reed contact already arise with the [Shelly Door/Window](#) and now also with the successor [Shelly Door/Window 2](#).

Unfortunately, the manufacturer's instructions contains nothing about this.

Well, I'm working with such contacts for a long time. All of my DW have been working reliably and flawlessly since installation.

There are actually only 2 points that you have to pay attention to:


1st:

The **distance** between the evaluation unit and the magnet can be **2-5 mm**. Direct contact of the magnet with the unit is absolutely of no advantage and can even have a negative effect.

2nd:

1 small arrow is printed on the side of the evaluation. This marks the middle of the reed contact. Also place the magnet in the middle. It will look like that:

Image not found or type unknown

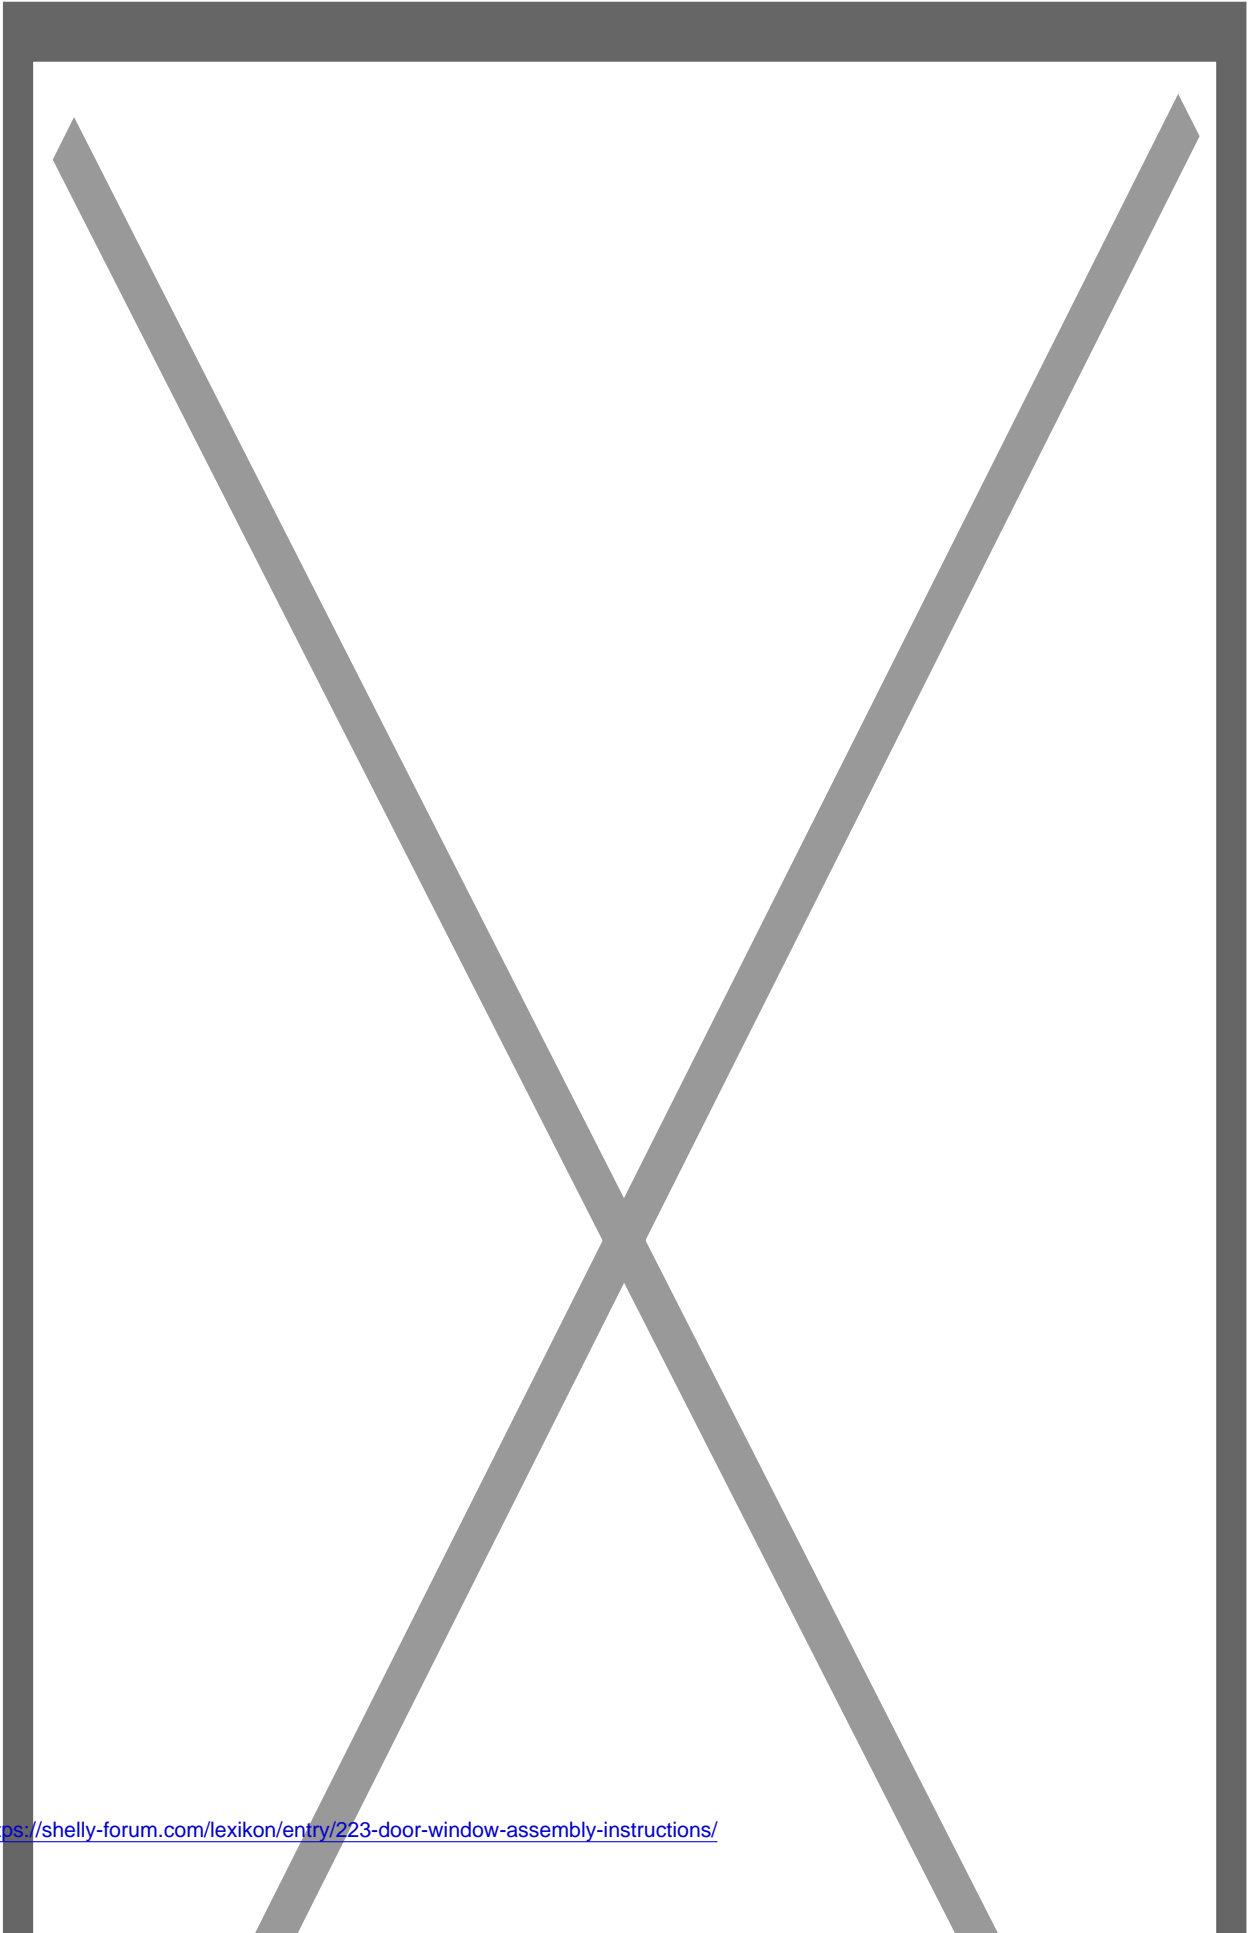

I wish you success. !thumbup.

!thumbup found or type unknown