



Settings on the Shelly Homepage - only for Shelly Plug / Plug S

Settings on the Shelly Homepage
Supplements specifically for Shelly Plug / Plug S

Only for [Shelly Plug](#) & [Shelly Plug S](#)

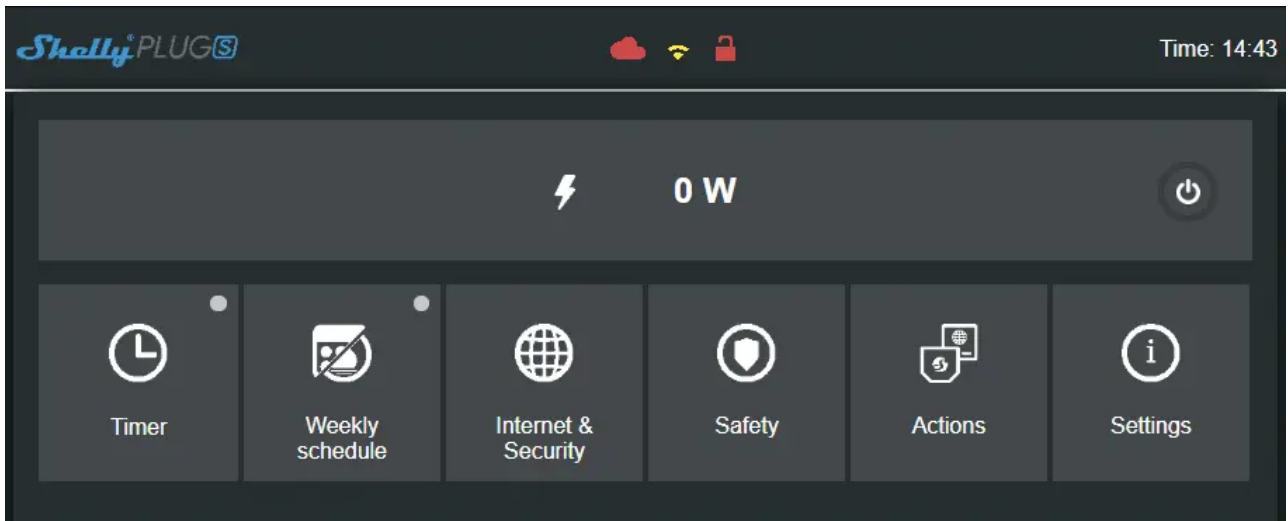

Safety

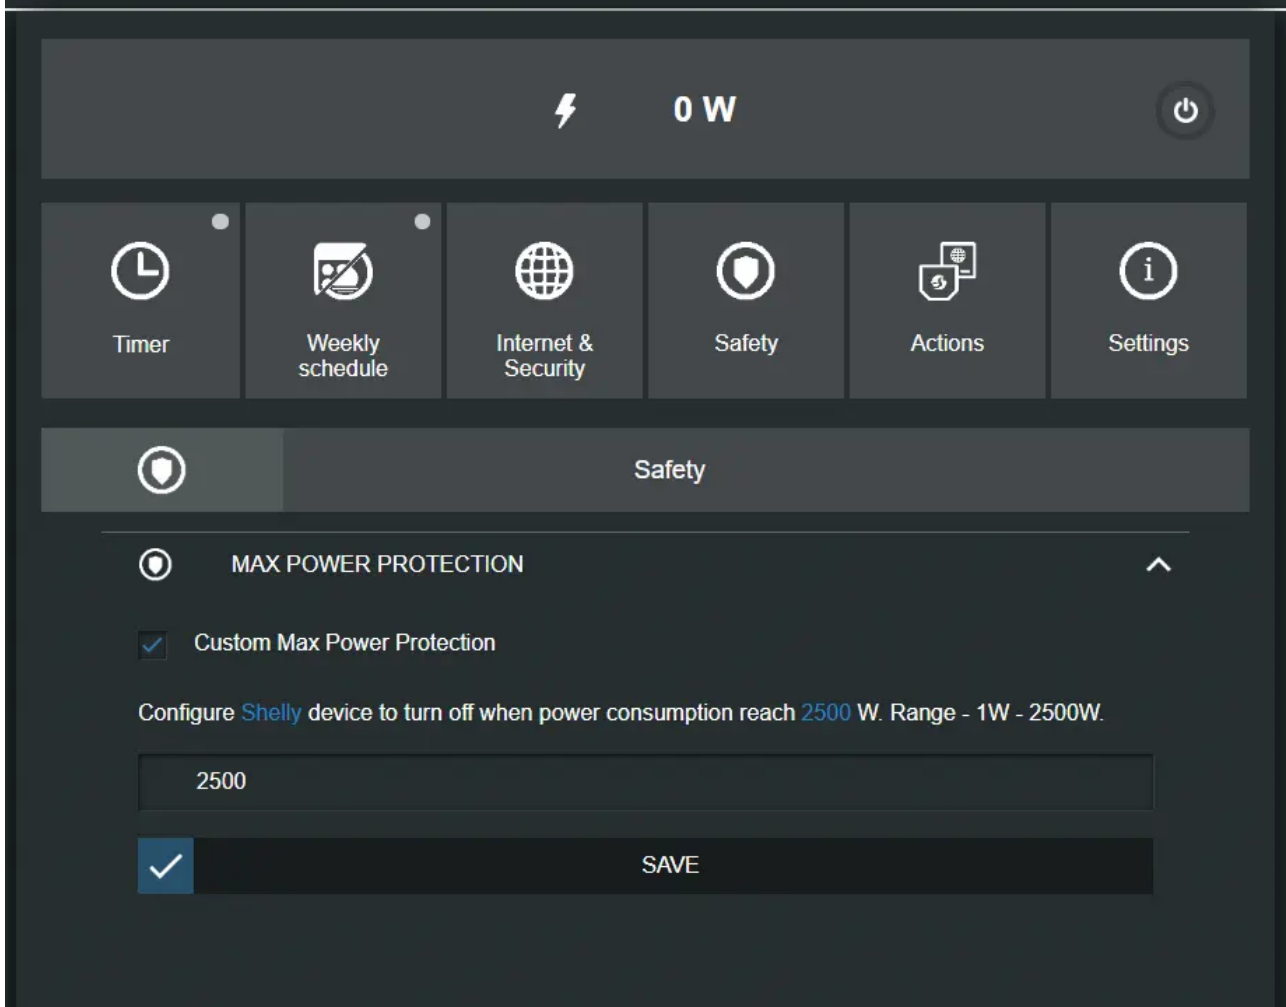


MAX POWER PROTECTION

Custom Max Power Protection - Configure Shelly to **turn off** when a defined power consumption is reached. Range: 1-3500W.

After typing the desired power consumption, press **Save**.

Actions

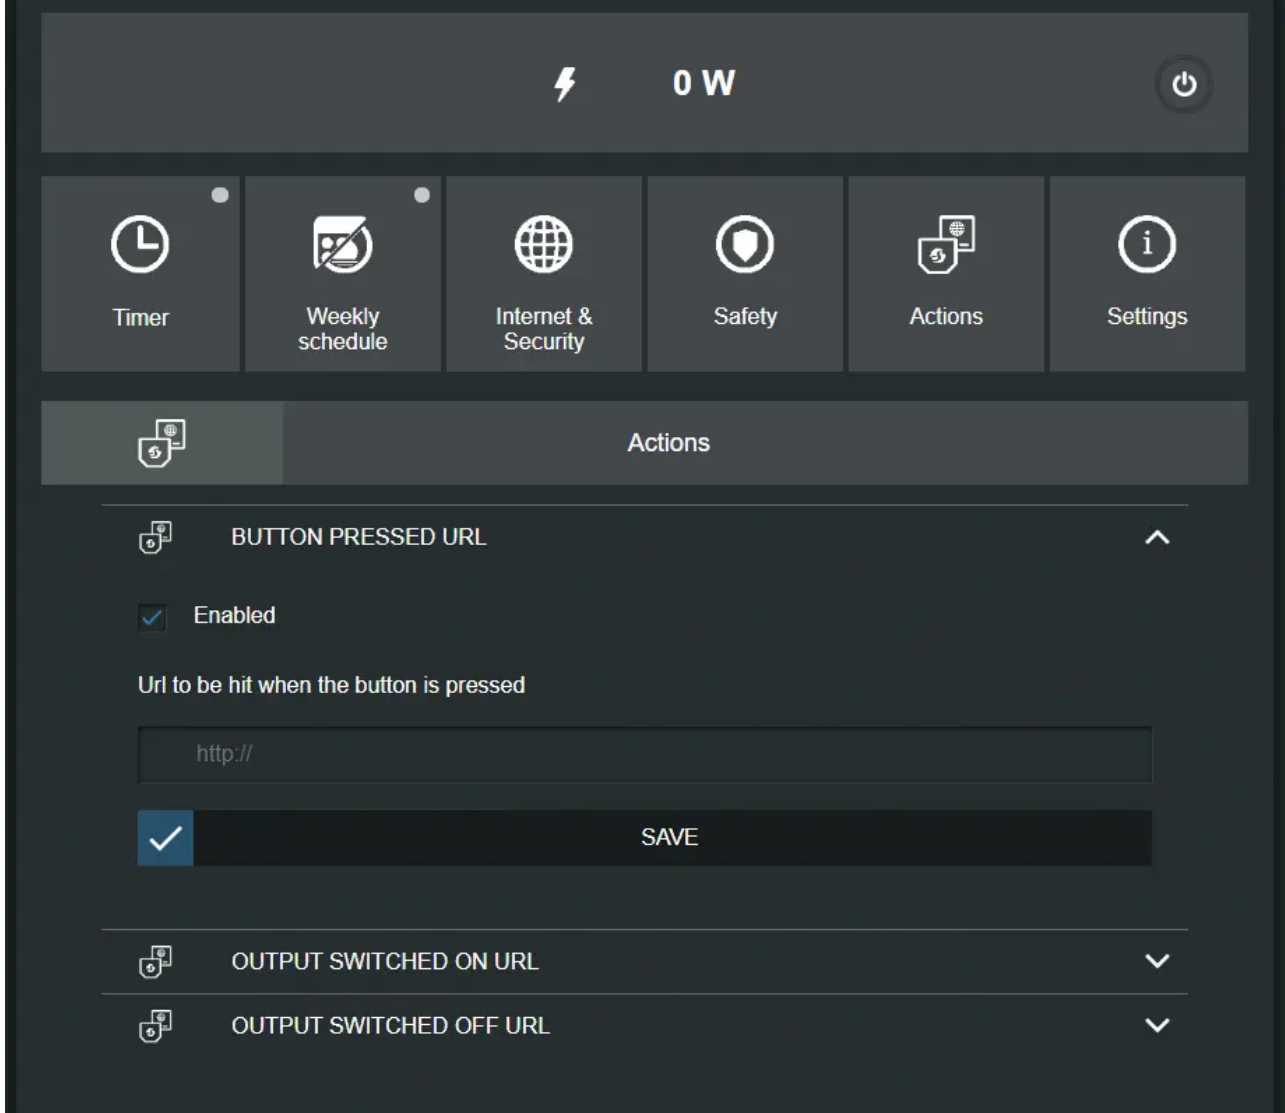

Ability to manage other devices that have an **HTTP-API** or activate scene in **IFTTT**.

More information: [Direct Device to Device communication \(DDD\)](#)

BUTTON PRESSED URL - Device-Button pressed -> execution URL


OUTPUT SWITCHED ON URL - Output (Relay) switched ON -> execution URL

OUTPUT SWITCHED OFF URL - Output (Relay) switched OFF -> execution URL

Settings



LED LIGHT CONTROL

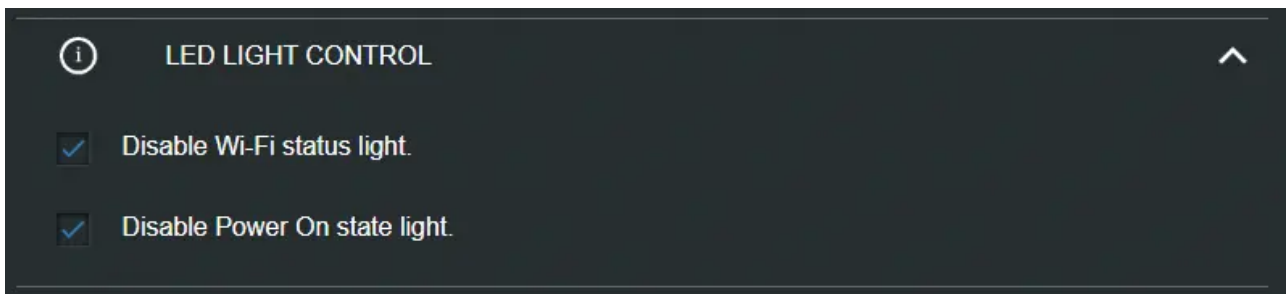

Disable Wi-Fi state light - Disable or Enable State-WiFi LED light. Activated LED lights up **blue**.

Disable Power On state light - Disable or Enable State-Power LED light. Activated LED lights up **red**.

LED light-State:

Blue - flashing quickly - **AP Mode**

Blue - flashing slowly - **CM Mode (no Cloud)**

Blue - still - **CM Mode (Cloud)**

Red - still - **Relais EIN**

Red & Blue - flashing quickly - **FW Update**